




TOOLS NEEDED

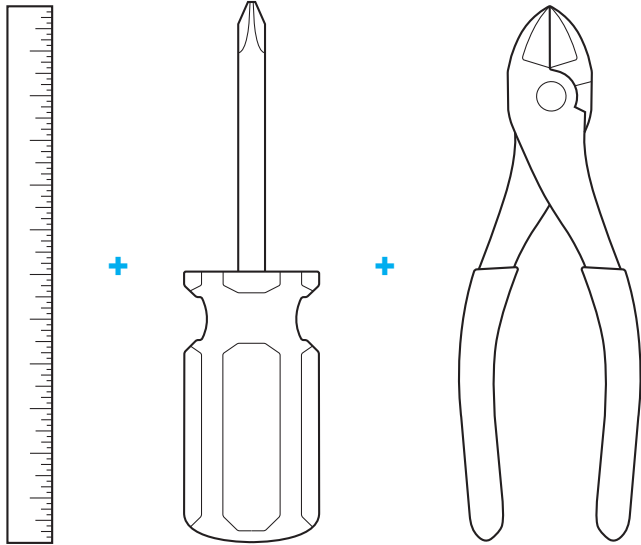

1: MEASURE


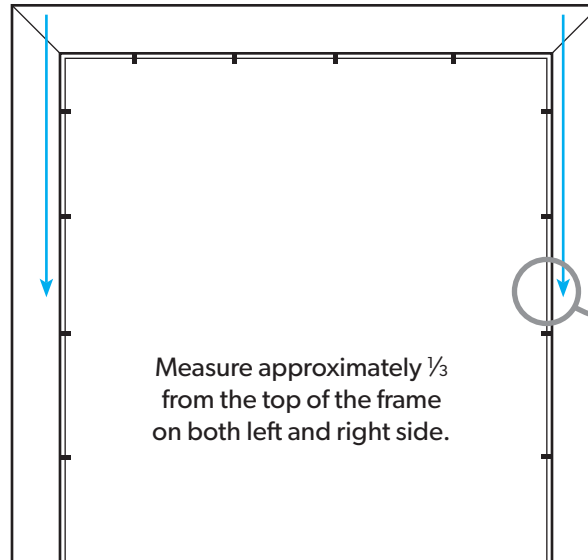


2: INSTALL D-RINGS


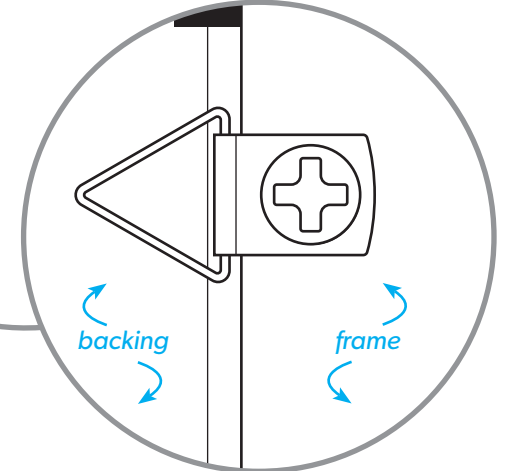


Place flat side of d-ring bracket on frame allowing d-ring to hang over backing. Secure in place with screw.

INCLUDED



3: TIE WIRE

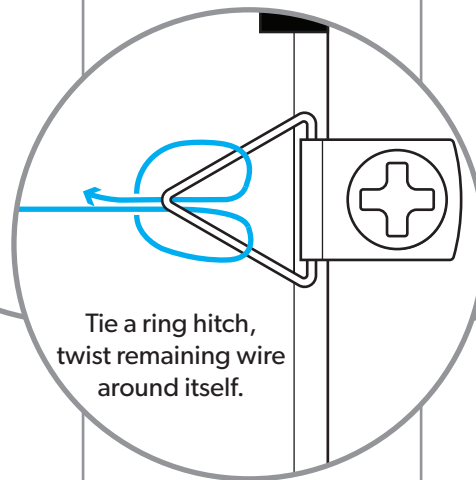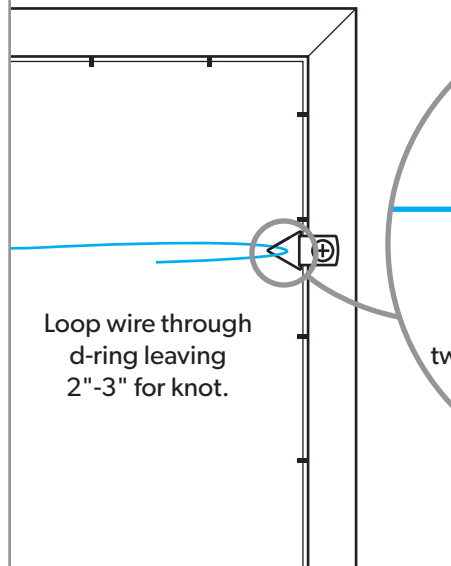

4: STRETCH + TIE WIRE

